

AT-RKMT6 Installation Manual

This manual will assist you in installation of your Rack Mount 6. When opening this Allied Telesyn product, make sure the package you have received is complete and in good condition. This package should include:

- 2 handles (A)
- 2 trim plates (B)
- 4 flathead screws (C) (M3-8 flathead Phillips)
- 1 mounting bracket (D)
- nylon tiewraps (F)

The Rack Mount 6 will assist you in installing the following repeaters in a standard 19 inch rack.

- AT-MR820T
- AT-MR420T

Installing your Allied Telesyn Rack Mount 6 is simple and quick (only requiring a Phillips screwdriver), as seen in Figure 1 below:

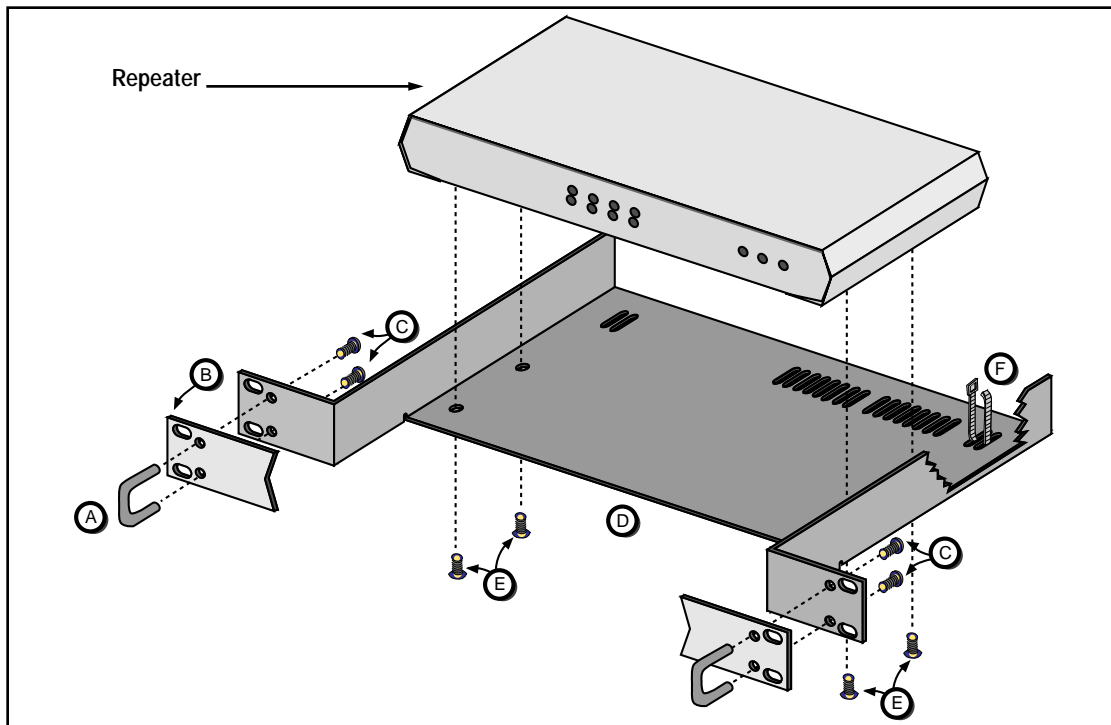


Figure 1: Installation

1. Attach handle A to trim plate B and bracket D with flathead screws C.
2. Remove the four rubber feet (not shown in Figure) from the bottom of the repeater, and reinstall the screws.
3. Attach bracket assembly to device (see list above) with flathead screws E.
4. Attach the single unit in a standard 19 inch rack.
5. Secure cables with tie wrap(s) F.


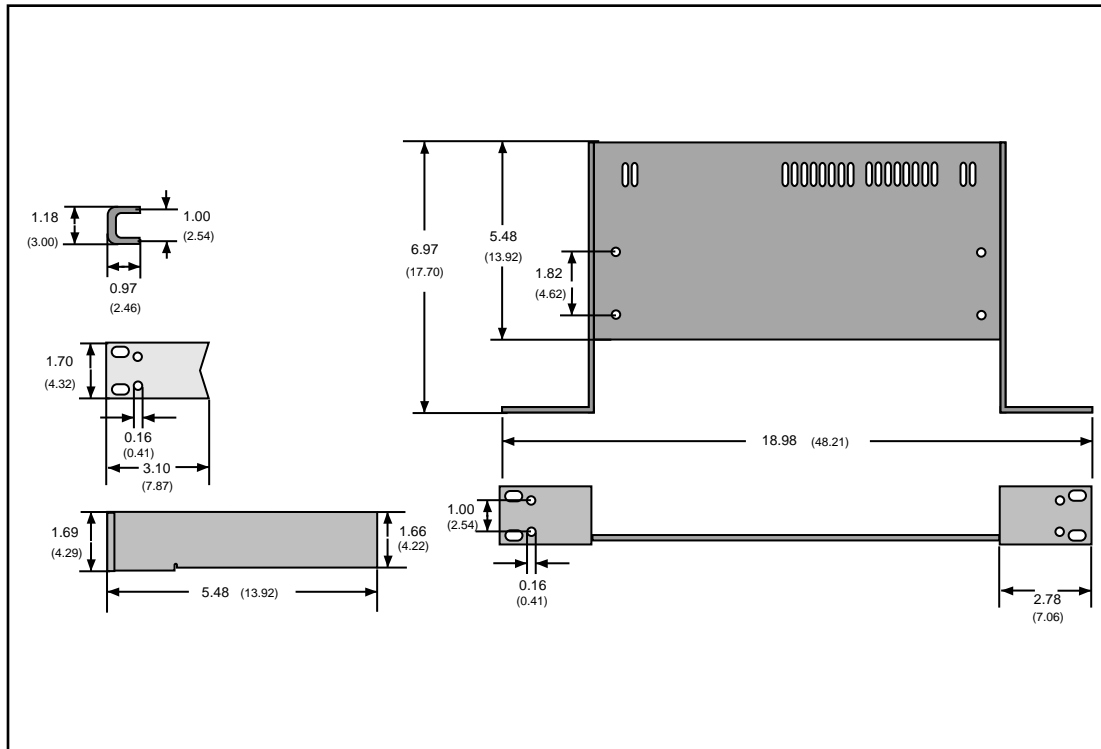


Figure 2: Dimensions



Allied Telesyn International
 950 Kifer Road
 Sunnyvale, CA 94086
 U.S. & Canada Tel: 800/424-4284
 International Tel: 408/730-0950

Technical Support Tel: 800/428-4835



This document produced using
 Recycled Materials